



- test.nju.edu.cn
- speed.nju.edu.cn
- [□□](#)
- [□□□□](#)



CLI

<https://github.com/librespeed/speedtest-cli>

`speedtest-cli`



IPv4

```
./librespeed-cli --server-json http://speed.nju.edu.cn/cli.json --server 1
```

IPv6


```
./librespeed-cli --server-json http://speed6.nju.edu.cn/cli.json --server 2
```

level full ISP speed.nju.edu.cn --telemetry-



XShell “WWWWW”

Shell XShell

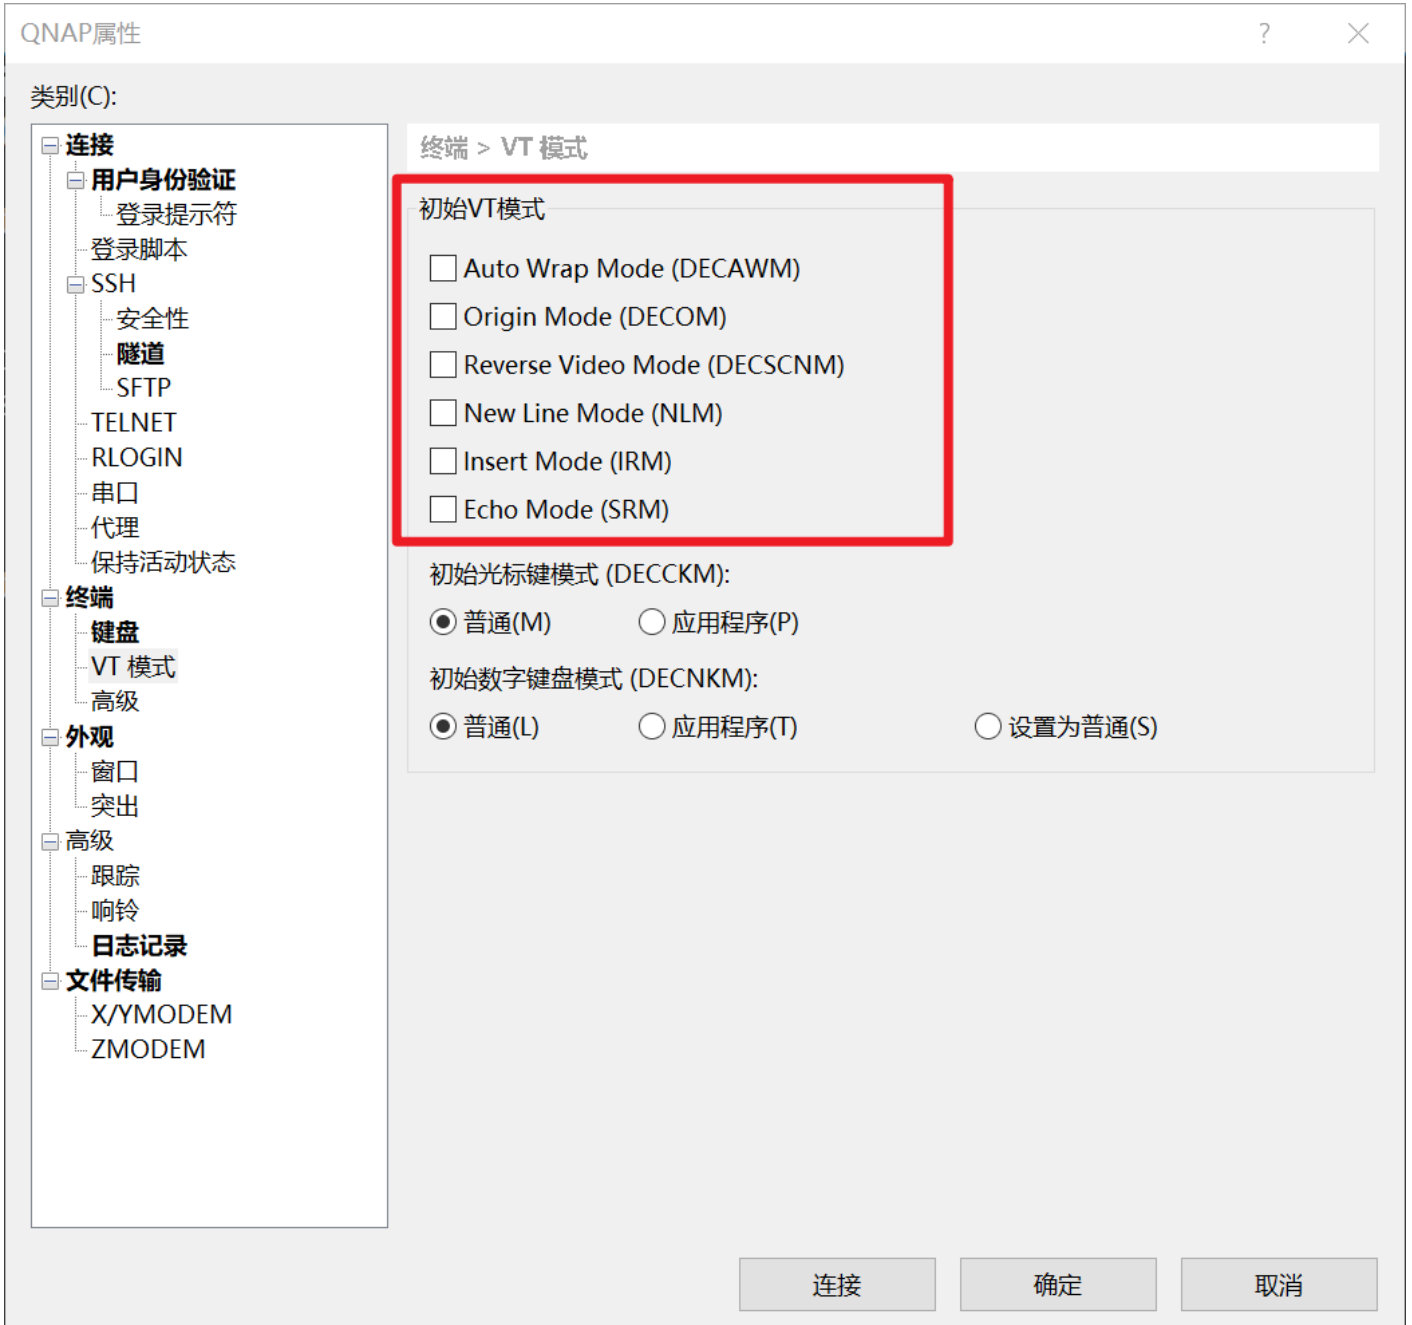

0



0

